




Type of Appliance	Condensing, Tankless, Temperature controlled, continuous flow, gas hot water system, Energy Star Qualified
Thunder Model Number	RC80iN (Natural Gas) RC80iL (Propane)
Operation / Installation	Forced combustion; indoor only
Minimum/Maximum Gas Rate (Input)	9,500 (Natural Gas), 10,300 (Propane) - 157,000 BTU/h
Electrical	Appliance: AC 120 Volts - 60 Hz Temperature Controller: DC 12 Volts
Electrical Consumption	Normal: 63 w Standby: 2 w Anti-frost protection: 220 w
Ignition System	Direct electronic ignition
Hot Water Capacity	Minimum flow rate: 0.26 GPM Minimum activation flow rate: 0.4 GPM Maximum flow rate: 8.0 GPM
Temperature	98° - 120° F (factory default) Maximum temperature is selectable at 120° F or at 140° F; 98° - 185° F available with the MCC-91 controller for commercial and hydronic applications
Temperature (without remote)	120° F (factory default) or 140° F
Approved Gas Types	Natural or Propane (ensure unit matches gas type)
Energy Factor (EF)	Natural Gas: 0.96 Propane: 0.96
Service Connections	Gas supply: 3/4 inch MNPT Cold water inlet: 3/4 inch MNPT Hot water outlet: 3/4 inch MNPT
Isolation & Pressure Relief Valves Included	Heavy duty forged brass Webstone Isolator valves EXP E2, certified to NSF/ANSI 61-8 for potable water
Water Flow Control	Water flow sensor, electronic water control and by-pass control
Minimum/Maximum Water Supply Pressure	15 - 150 PSI (50 PSI or above is recommended for maximum flow)



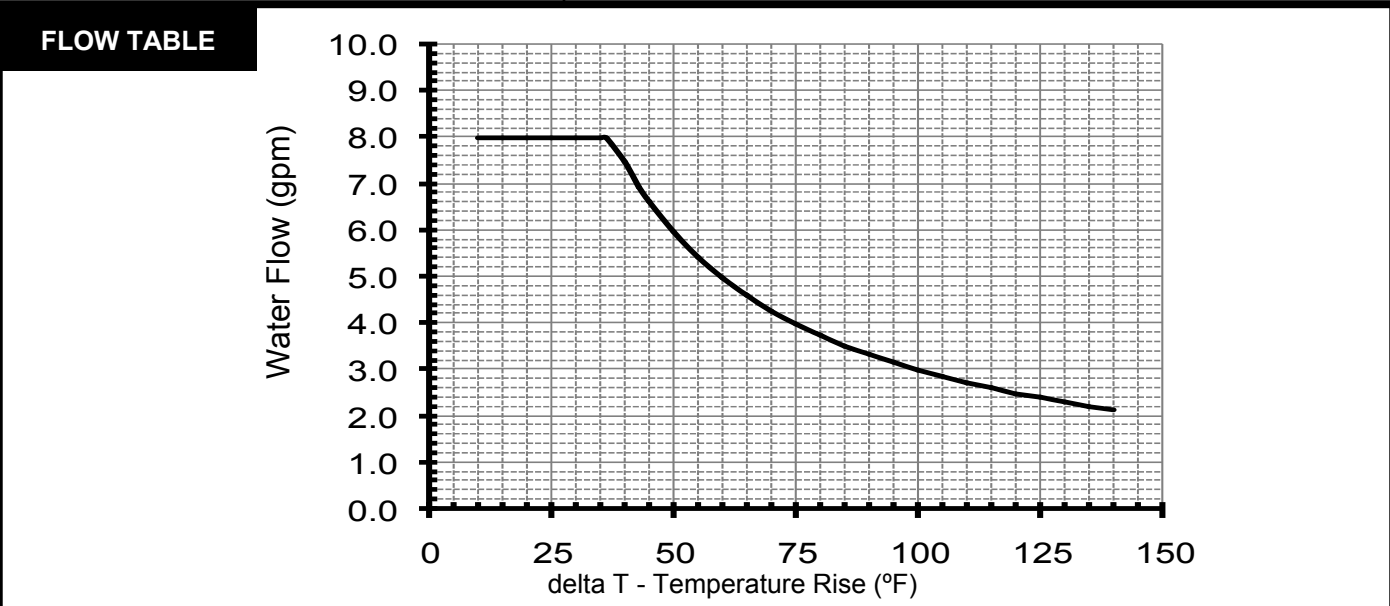

Controller

MC-91-1US (included)
 Deluxe controller: MC-100V-1US (optional)
 Bathroom controller: BC-100V-1US (optional)
 MCC-91-1US (for commercial applications)

Controller Cable

Non-polarized two-core cable, minimum 22 AWG

Safety Devices

- Flame failure - Flame Rod
- Boiling protection
- Combustion fan rpm check
- Over current - glass fuse (3 amp)
- Remaining flame (OHS)
- Thermal fuse
- Automatic frost protection

Clearances from Combustibles

* 24 inches required for serviceability

- Top of heater - 6 inches
- Front of heater - 6 inches *
- Sides of heater - 2 inches
- Back of heater - 0 inches
- Bottom of heater - 12 inches
- From vent pipe - 0 inches

Clearances from Non-combustibles

* 24 inches required for serviceability

- Top of heater - 2 inches
- Front of heater - 6 inches *
- Sides of heater - 1/2 inches
- Back of heater - 0 inches
- Bottom of heater - 12 inches
- From vent pipe - 0 inches

Min. / Max. Gas Supply Pressure

Natural Gas: min 5" W.C. max 10.5" W.C.
 Propane Gas: min 8" W.C. max 13.5" W.C.

Manifold Gas Pressure (inches W.C.)

Natural Gas: high fire 2.9" W.C. low fire 0.70" W.C.
 Propane Gas: high fire 3.7" W.C. low fire 1.06" W.C.

NOx

Meets California and Texas NOx Emission Rules

Warranty

Heat exchanger: 12 years* for residential and 5 years* for commercial and hydronic applications; (10 years* if used with the Rinnai Hydronic Air Handler); all other parts 5 years*; labor 1 year; (* 3 years if used as a circulating water heater within a circulation loop, when the water heater is in series with a circulation system, all circulating water flows through the water heater and without an on-demand recirculation system). Refer to the manual for complete warranty information.

Rinnai is continually updating and improving products; therefore, specifications are subject to change without prior notice. Local, state, provincial and federal codes must be adhered to prior to installation.

DIMENSIONS		WEIGHT: 63.9 lb (29 kg)		DIM	DESCRIPTION	in (mm)
<p>* This is the minimum dimension from the wall. The wall bracket is adjustable to allow an additional 1.57 inches (40 mm).</p>				A	Width	18.5 (470)
				B	Depth	10.5 (266.9) *
				C	Height - Unit	26.4 (670)
				D	Height - with brackets	28.5 (723.2)
				E	Hot Water Outlet - from wall	4.3 (110) *
				F	Hot Water Outlet - from center	3.9 (100)
				G	Cold Water Inlet - from wall	2.9 (74.6) *
				H	Cold Water Inlet - from center	1.1 (27.7)
				I	Gas Connection - from wall	3.9 (99) *
				J	Gas Connection - from center	4.1 (103.2)
				K	From base to gas connection	1.6 (40.2)
					From base to cold connection	2.0 (50.2)
					From base to hot connection	1.6 (41.2)
				L	Condensate Dain - from wall	5.2 (132.6) *
M	Condensate Drain - from center	7.7 (195)				

